


## 80C21.5 (15-CE2)

# Submersible sewage cutter pump 3"



Curve Q-H

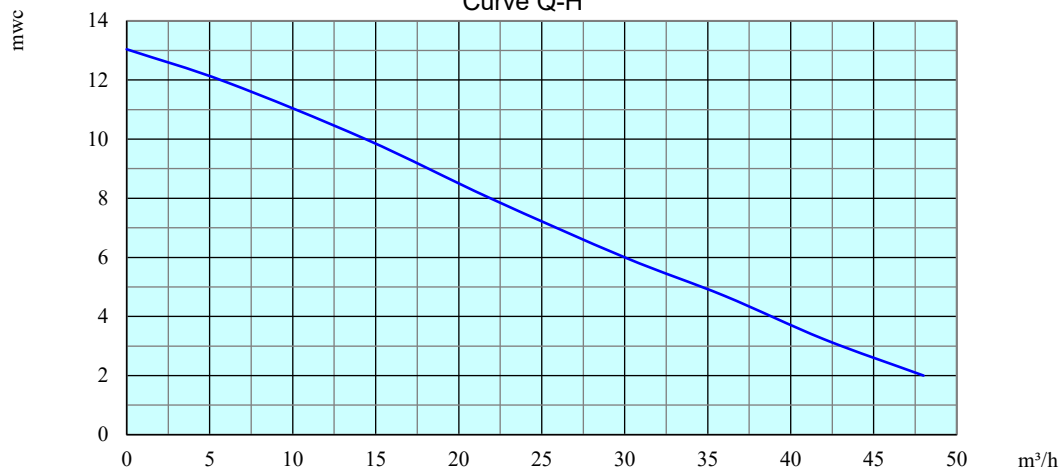

Type	: Tsurumi, 80C21.5
Applications	: strongly contaminated fluids, waste water, sewage, muddy water, ....
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,88 kW at 2.850 rpm
Nominal current	: 3,9 A
Free impeller passage	: 37 mm
Weight	: 38 kg ( without cable )
Height	: 483 mm
Diameter	: Ø 446 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: large free impeller passage tungsten tipped single channel impeller for cutting solids for pumping against a serrated suction cover
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p